



## Product Data Sheet

# Fixed Bollard - Stylemaster

## PS-VBLB-Stylemaster

Fixed bollard concealed under special design cover

The Stylemaster is designed to take into account the existing threats and risks of a site while allowing for the architectural and functional aspect of a site.


STYLEMASTER is a shockproof bollard that fits perfectly within an innovative material that allows the combination of safety and improvements to the environment.

## Specifications

## Technical features

Fixed bollard structure:	Steel sheet of Ø 250 mm, cathaphoresis treatment and RAL 7021 epoxy powder painting, optional custom colours of internal bollard
Shell structure:	Innovative eco-active material: a new-generation synthetic resin; it contributes to the health of users by purifying the surrounding environment. It is antibacterial, self-cleaning and eliminates toxic chemicals by simple contact. Also available in stone.
Dimensions:	Shell: Height 730 - 1250mm with 396mm Diameter. Bollard: Ø 250 mm - H - 600 mm
Security by Design:	This bollard is part of a Security by Design approach, to engage professional expertise that is consistent in taking into account all the existing threats, risks and constraints in both architectural and functional aspects of a site, while advocating efficient security solutions. The Stylemaster Bollard has been crash tested to meet 432 KJ Rating with a dual test of 1.5t vehicle at 50 km/h and up to 7.5t vehicle at 80 km/h.

Product Code	Finish	Overall Size	Terminal Dimensions	Resistance rating	Additional steel frame for bollard	Induction Charging	Depolluting surface
Mini Stylemaster	Certified Depolluting and Antibacterial resin	730mm H x 395mm Diameter	250mm D x 600mm H	432,000 J 7.5T vehicle at 50 KM/h	Yes	Yes	1.0m2
Style Master	Certified Depolluting and Antibacterial resin	1250mm H x 395mm Diameter	250mm D x 600mm H	432,000 J 7.5T vehicle at 50 KM/h	Yes	Yes	1.0m2

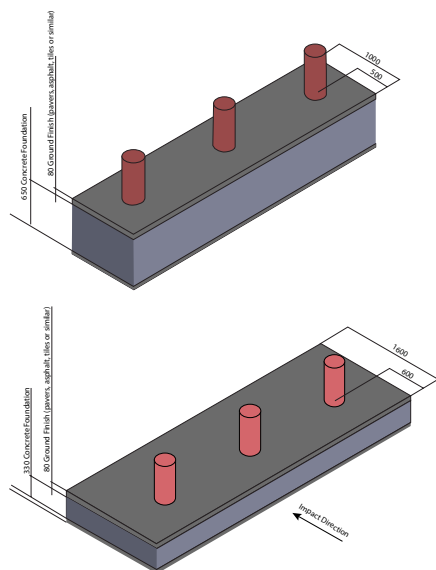

Note: all dimension in mm

